



Contents

Imperial 6 - 7

Infinite 8 - 9

Hinterland 10 - 11

Herringbone 12 - 13

Care and Maintenance





Features

Constructed with an 8 layer multi-ply core, our Regency Hardwood range is designed and made for durability and superior stability.

Core

Multi-ply construction is made of multiple thin hardwood sheets that are arranged, glued and pressed with the grain running at right angles to the adjacent sheet. This unique assembling method creates a product that is more stable than others.

Joining System

The tongue and groove joining system is one of the oldest methods used in flooring. It has proven stability, and ensures a smooth installation process. By using the tongue and groove system with a hardwood ply core, this mechanism provides optimum stability and our floors are less likely to cup, twist or squeak with environmental changes.

Installation

Regency Hardwood® is designed to be floated which allows space for movement in the timber that occurs naturally over time.


Floating will allow your floor to age gracefully and at the same time move with environmental changes. Using crosslinking PVA glue between the joints acts as a sealant so that in an event where minor spillage occurs, water ingression is prevented.

Warranty

Australian Select Timbers takes pride in providing the best quality for our customers, with a Lifetime Structural Warranty, 20 Year Residential Wear Warranty with a 5 Year Commercial Warranty on the Regency Hardwood® Range. You can rest easy that your engineered flooring will leave you nothing short of completely satisfied, allowing you to enjoy the natural beauty of the timber throughout the years.

(Please refer to our full warranty terms and conditions).



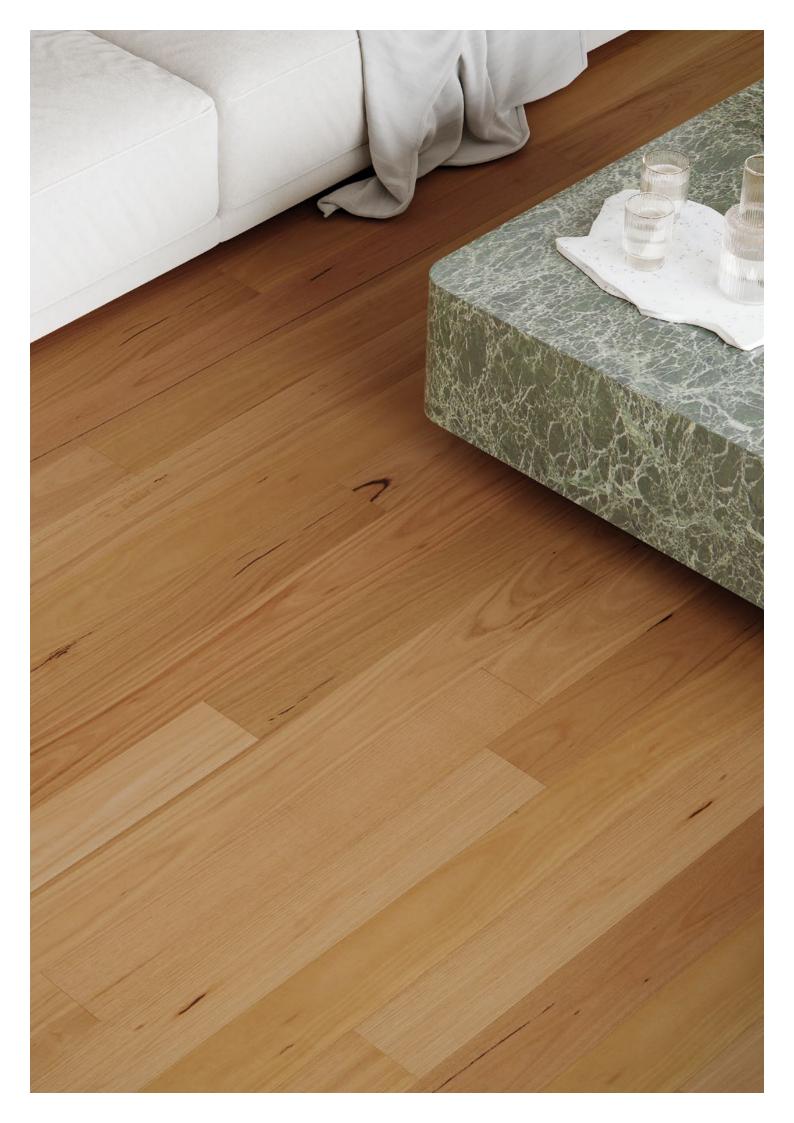





Regency Hardwood Imperial

Available in Blackbutt and Spotted Gum in a classic 136mm width or contemporary 189mm width, the Imperial range has a high quality German KLUMPP smooth clear lacquer coating to let the variations of each board truly shine.

Specifications

Smooth finish | Matte | UV lacquer Nested boards in packs* Available in 136 and 189mm wide boards





Blackbutt 1860 x 136 x 14mm




Spotted Gum 1860 x 136 x 14mm



Blackbutt 1860 x 189 x 14mm



Spotted Gum 1860 x 189 x 14mm

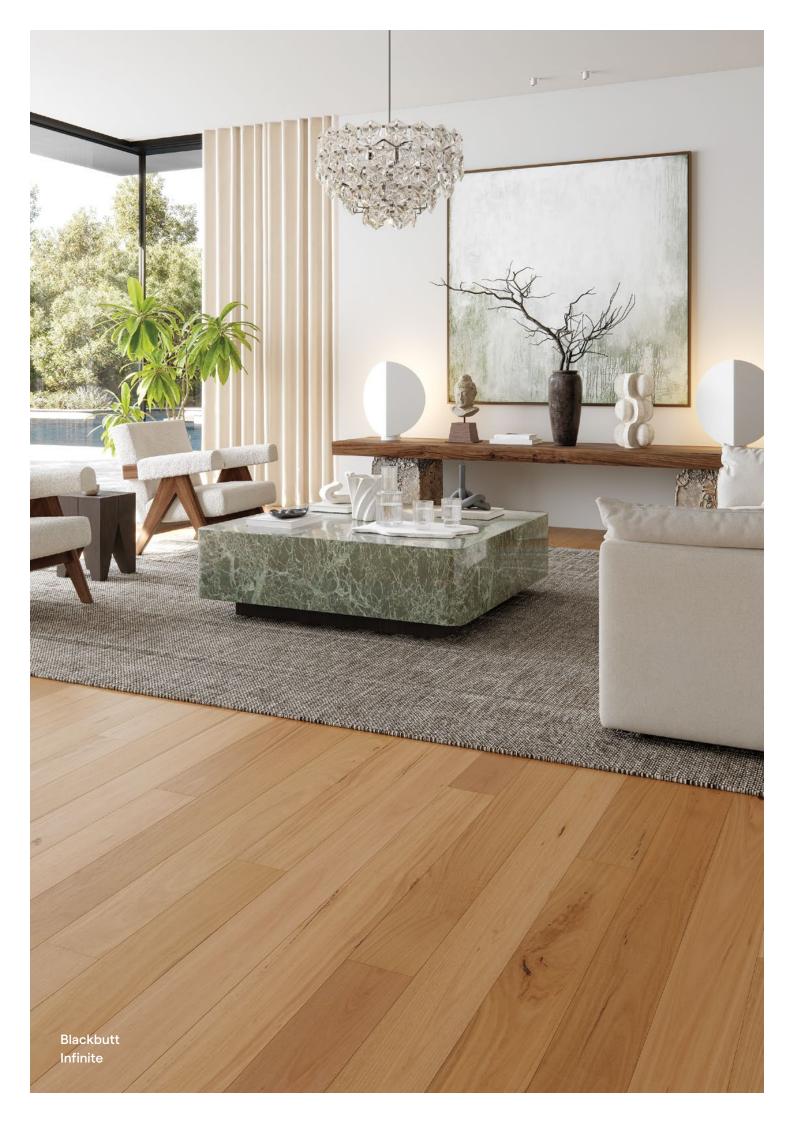



Regency Hardwood Infinite

Wire brushing and a high-quality German wax oil finish champion the natural knots and grains of these Australian species floors. Infinite is available in a Blackbutt or Spotted Gum in a 189mm width making it a perfect floor to modernise an otherwise classic style.

Specifications

Hard wax oil | Matte | Wire brushed Nested boards in packs*




Blackbutt 1860 x 189 x 14mm



Spotted Gum 1860 x 189 x 14mm



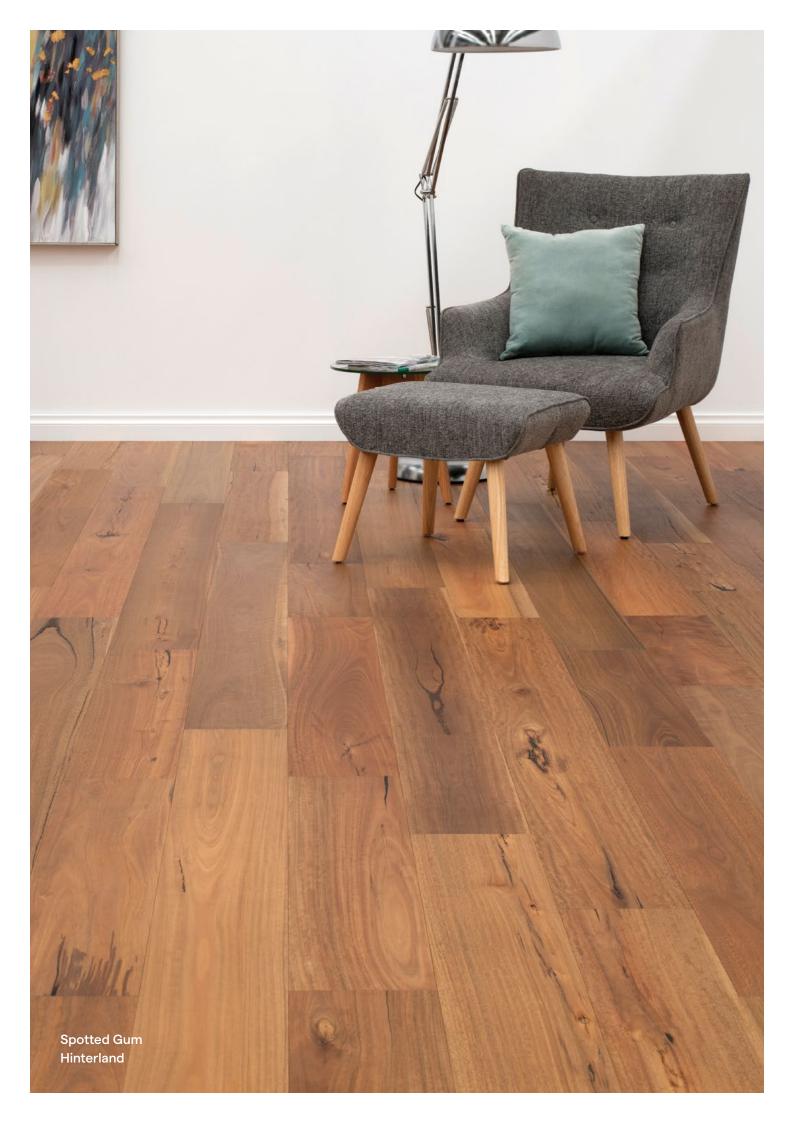



Regency Hardwood Hinterland

Perfectly imperfect, the Hinterland range features rustic hardwood for natural elegance. Add warmth and character to a comfy country retreat or an industrial style loft. Hinterland is available in a 189mm width to give the floor a beautifully wide canvas to show off its personality.

Specifications

Hard wax oil | Matte | Wire brushed Nested boards in packs*




Blackbutt 1860 x 189 x 14mm



Spotted Gum 1860 x 189 x 14mm



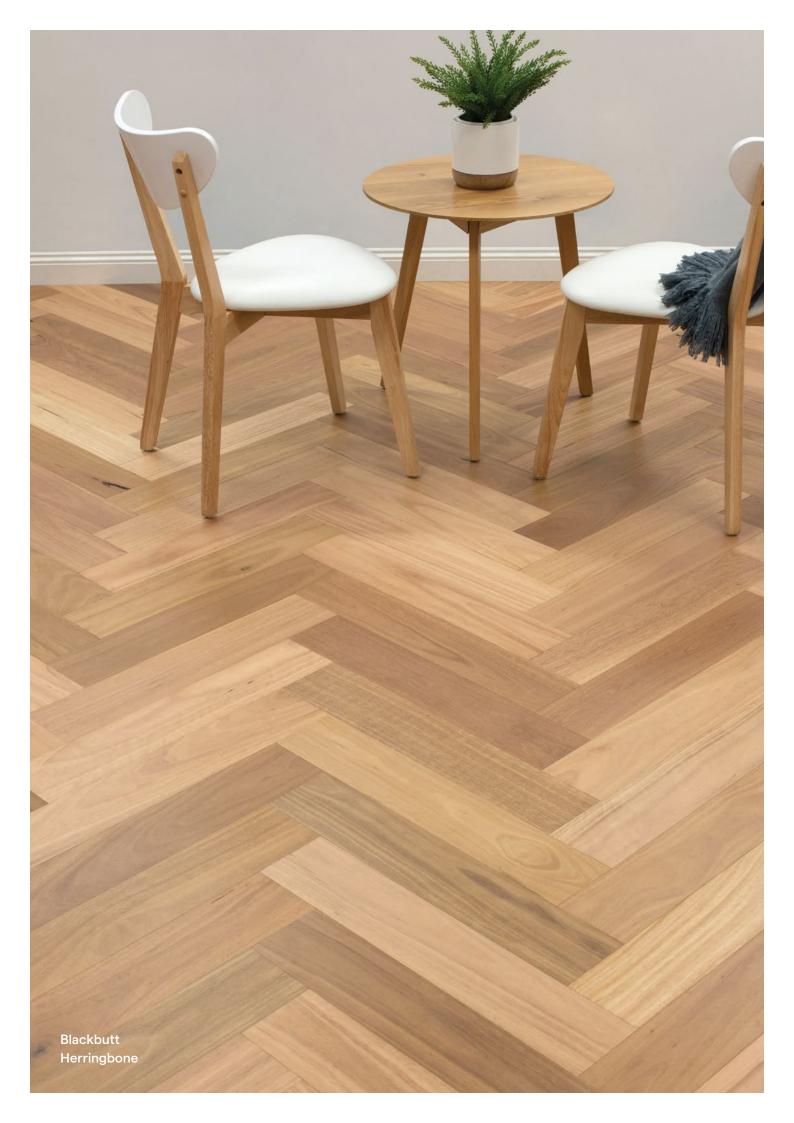



Regency Hardwood Herringbone

Selectively crafted from Spotted Gum or Blackbutt timbers, the Herringbone range is a stunning rendition of French parquetry with an Australian twist. The stunning colour variations within each board enhances the parquetry design creating a wonderfully featural floor.

Specifications

UV lacquer | Matte | Smooth finish All full length boards Left & Right reverse tongues






Blackbutt 600 x 120 x 14.5mm



Spotted Gum 600 x 120 x 14.5mm

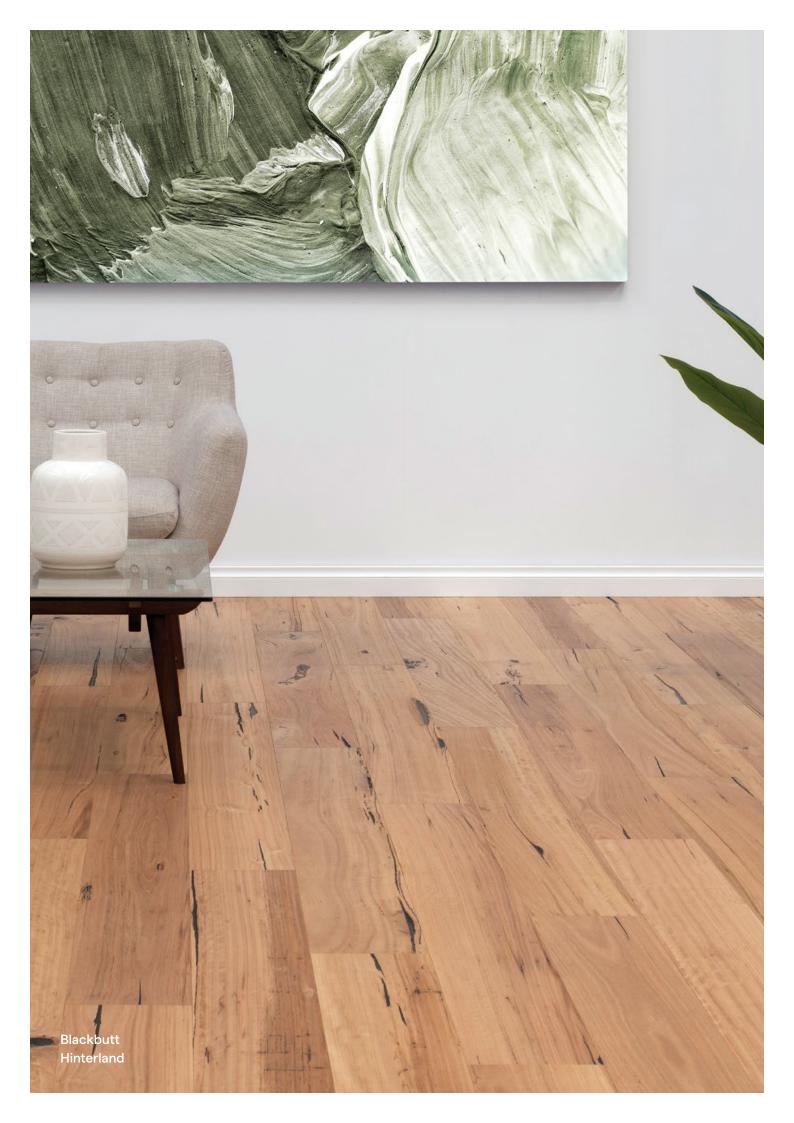

Care and Maintenance

Follow these care and maintenance guidelines to ensure your floor maintains its beauty for many years to come.

Preventative Maintenance

- Installing good quality mats inside and outside of external doors to trap grit and remove moisture from shoes is a sensible precaution and will reduce the possibility of scratches.
- In high traffic areas or areas where spillage may occur the use of mats is recommended to give added protection.
- All furniture should have felt pads fitted to the base of legs or on other areas in contact with the floor to avoid scratches. On heavy furniture felt backed castors can be used if required.
- Avoid using wheeled chairs i.e. office furniture or ensure that a large, good quality office mat is used to prevent indentations in the timber.
- Rubber based items e.g. the backing for matting, castors under furniture and rubber tipped furniture feet should not be in direct contact with the floor.
- Keep pet's nails trimmed to protect the floor from scratches.
- All timber reacts when exposed to direct sunlight and this may cause colour changes or fading. Curtains, blinds, or UV resistant films on windows should be considered to reduce the exposure to direct sunlight and protect the flooring. Furniture and rugs should be moved occasionally so that the effect of sunlight on the floor is uniform.
- Any materials spilt on the floor should be wiped up immediately.
- Maintaining the temperature and humidity within a reasonably consistent range will keep the floor stable.
- Dry cleaning of the floor should be carried out regularly to remove loose dirt, grit and dust. Use a SelectCare+ Dusting pad or soft broom. If vacuum cleaning, the cleaning head must have a soft brush to not damage the floor.
- For UV Lacquer finished floors, use a SelectCare+ Spray Mop with SelectCare+ Hard Floor Cleaner to clean the floor surface when required; dry clean the floor first. Do not 'wet' mop the floor anytime as excessive amounts of water may cause damage.

Avoid the following:

- Indentation from stilettos or spiked heeled shoes.
- Pulling or pushing furniture or other objects across the floor.
- Avoid using a steam mop, abrasive cleaning materials or harsh detergents / household cleaners on the floor. Using these cleaning methods / materials will harm the surface of the floor and may cause physical damage to the boards.
- Do not use solvents of any kind to clean the floor. Methylated Spirits, Turpentine or similar materials will damage the floor surface.

Important Note: All Regency Hardwood® wax oil finished products need to be re-oiled and maintained every 12-18 months for residential use and 6 months for commercial use to keep the floor fresh and ensure the warranty won't be compromised. Please download our Regency Hardwood® Care & Maintenance Guide from our website for full details.

Australian Select Timbers®

www.asttimbers.com.au